

Products Description

Please read this manual before installation and connection.

- The host intercom adopts physical press button and integrated high-performance conference microphone; Outside speaker is equipped with external microphone.

- It has two-way intercom, recording output, volume adjustment.

- Power supply mode: power supply by power adapter.

Application scenarios include banks, security rooms, hospitals, bus stations, etc.

Installed in the place of anti-theft glass

Features

- Duplex Intercom

SD-2006DL+ supports two-way intercom inside and outside the window.

- Clear sound | Volume adjustment

The voice is clear, natural and loud. That support the sound inside and outside the window, and the volume can be adjusted.


- Auto-mute

SD-2006DL+ supports infrared detection function and can enter into mute mode automatically.


- Easy to Use

Plug and Play, Easy installation, support desktop placement or wall mounted. Power adapter(DC12V/200mA)

Package Includes



1 x Dual-way host intercom



1 x Outside Speaker



1x Power Adapter



1x User manual

Host Intercom


- 1 Counter Intercom Control (Host)**
 - Volume control button
 - Counter MIC switch
 - Indicator light
- 2 External Speaker Control (Sub)**
 - Volume control button
 - Counter MIC switch
 - Indicator light
- 3 OUT**

Connection jack of External Speaker (Sub).
- 4 MIC.**

Internal MIC 3.5mm jack.
- 5 REC.**

Record, monitor and interjection 3.5mm jack.
- 6 POWER**



Power jack for power supply DC12V / 0.2A.

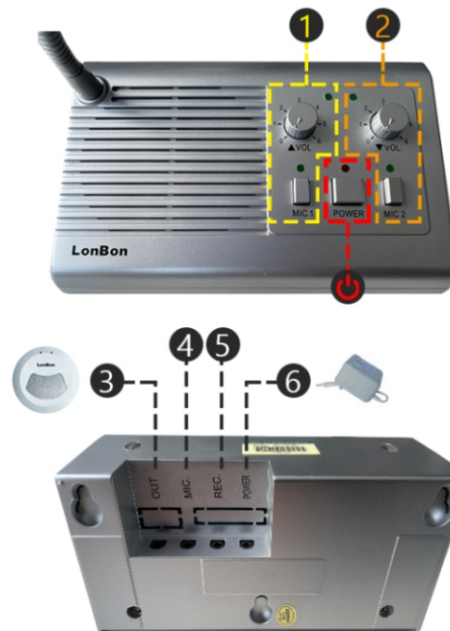


Outside Speaker

- 7 Outside Speaker**
- 8 Outside Microphone**
- 9 Infrared Sensor**


Built-in infrared sensor can automatically detect whether there are customers handling business outside the window.

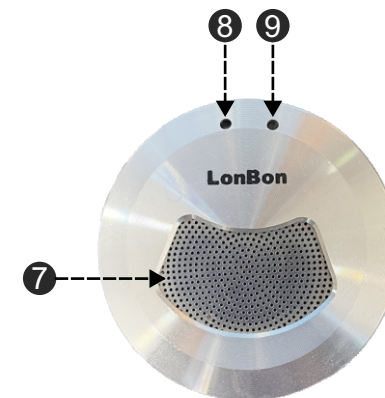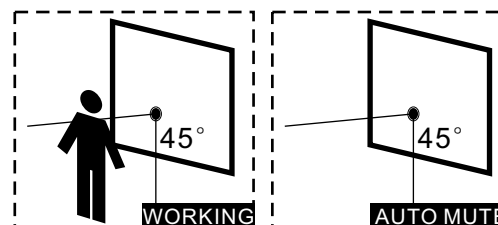

How to Connect

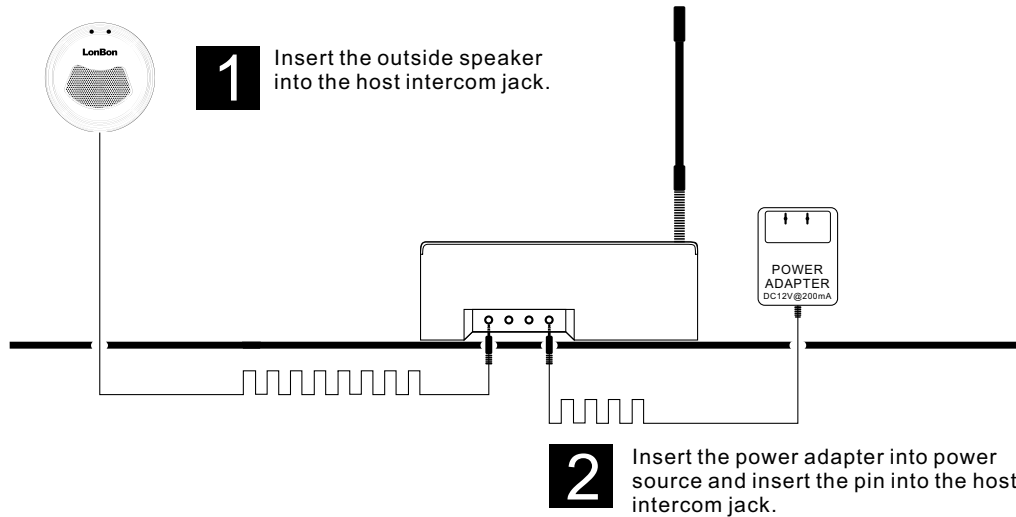

How to Install

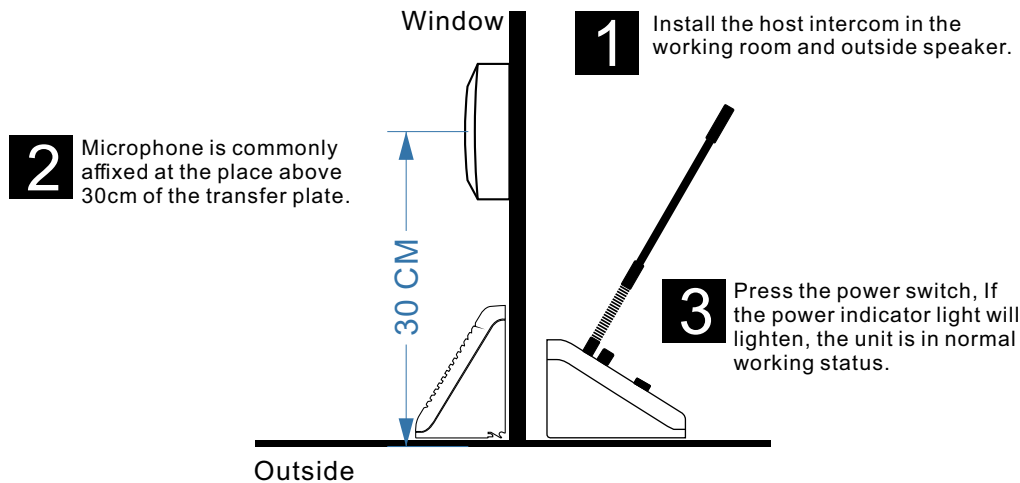

Technical Specifications

Host speaker impedance power:	8 Ω, 1.5W
Extension speaker impedance power:	8 Ω, 1.2W
Host microphone sensitivity:	-51 ± 2dB
Output frequency	20Hz~20KHz
Sensitivity of extension microphone:	-44 ± 2dB
Signal to noise ratio:	≥ 90dB
Harmonic distortion:	< 0.5%
Working temperature:	-20 °C ~ + 60 °C
Working humidity:	10% - 90%
Host size:	80x150x55mm
Extension size:	∅ 64x18mm
Host microphone length:	360mm
Cable length	1.9m (Distance from host to extension)
Material	Plastic (Host station) Aluminum alloy (Extension station)

Precautions



Negligence may cause serious injury.



Do not disassemble or modify the equipment.
May cause fire or electric shock.



Do not install or connect the device with the power on.
May cause electric shock or malfunction.



Do not put your ear close to the speaker when using the device
If you make a loud noise suddenly, it may cause damage to your ears.

Warranty Card

Product model: _____

Date of purchase: _____

Serial Number: _____

Seller: _____

Contact Number: _____

User Name: _____

Contact Number: _____

Address: _____

Zip Code: _____

Notes:

1. Most new products offer a three-year manufacturer's warranty from the date of purchase.

2. For warranty service, you need to provide proof of receipt purchased from the actual seller for verification.

Exclusions from warranty:

- To any product damaged by accident.
- If the product is misused or abused, or due to unauthorized modification or maintenance.
- The serial number has been changed, defaced or deleted.